

High quality of light and color rendering (90+ CRI, 50+ R9),
with low flicker, flicker <30%,
Smooth dimming. Dimming lower than 10%.




ELECTRICAL SPECIFICATIONS


SKU	LUMEN	POWER	CCT	BEAM	CRI	PF	FINISH
SB-MS6DLR1227	1161LM	12W	2700K	120°	>90	>0.9	BLACK/WHITE
SB-MS6DLR1230	1161LM	12W	3000K	120°	>90	>0.9	BLACK/WHITE
SB-MS6DLR1240	1161LM	12W	4000K	120°	>90	>0.9	BALCK/WHITE
SB-MS6DLR1250	1161LM	12W	5000K	120°	>90	>0.9	BLACK/WHITE

MECHANICAL SPECIFICATIONS

MODEL NO.	MEASURES	WEIGHT	OPERATIONAL TEMPERATURE	INNER BOX QTY	MASTER CARTON QTY
SB-MS6DLR1227	6.0in X 2.08in	8.11oz	-20°C - 40°C	6pcs	30PCS
SB-MS6DLR1230	6.0in X 2.08in	8.11oz	-20°C - 40°C	6pcs	30PCS
SB-MS6DLR1240	6.0in X 2.08in	8.11 oz	-20°C - 40°C	6pcs	30PCS
SB-MS6DLR1250	6.0in X 2.08in	8.11 oz	-20C - 40°C	6pcs	30PCS

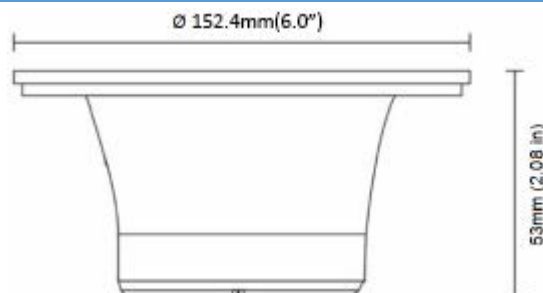


DOWNLIGHT 12W

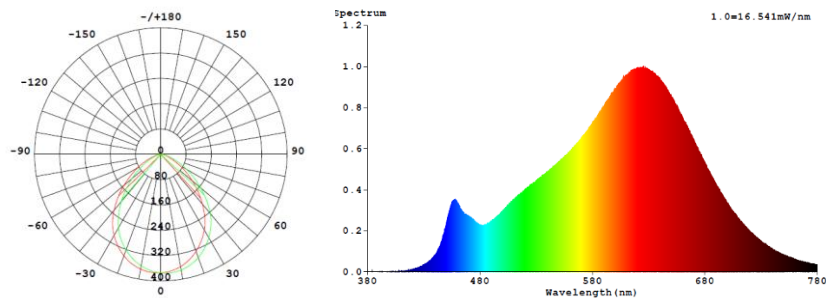

RA – CHART: >90

RA refers to the average value of R1 to R8.

R9 is the score that represents how accurately a light source will reproduce strong red colors. "Accurate" is defined as similarity to daylight or incandescent bulbs, depending on the color temperature.

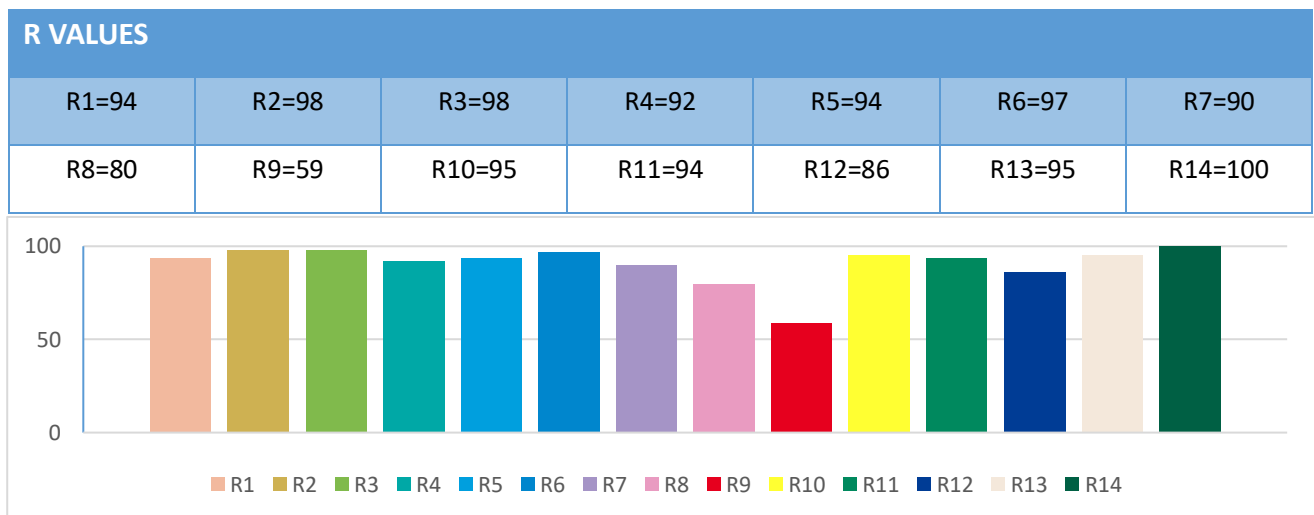

TM30 GRAPHIC

TM-30 deals with the color rendition of object.

Rf- a fidelity index that is similar to the commonly used CRI

Rg- a gamut index that provides information about saturation

Color vector graphic- a graphical representation of hue and saturation relative to a reference source.

