



SILVER BRIDGE TRADING CORP

2-DOOR CHILLER & FREEZER



Polar Freeze Brand



Self-Contained Display Case

Upper Compressor & Low Base

FEATURES



Larger opening area



Multiple forms of shelves



Intelligent temperature controller



Tempered and Low-E coated glass



Energy saving and high efficiency



Cassette system



Rich accessories



RAL colour choices

SPEC SHEET

Model # PB-LB15E/KSX-M01

(Chiller)

Power Supply (Volt/Hertz)	110V/60Hz
Power (W)	520W
Current Power (A)	5.9A
Receptacle	NEMA 5-20R
Body Size (L*D*H)	60"*30.7"*86.61"
Inner Dimension (excluding side panels) (L*D*H)	55.43*25.67*67.28
Shelves	10
Temperature	37.4°F~46.4°F
Cooling System	Air Cooling
Compressor	Embraco / Secop
Fan Motor	EBM
Surrounding	III (77°F, 60%RH)
Refrigerant	R290
Evaporator	Copper Tubes with Aluminum Fins
Condenser	Copper Tubes with Aluminum Fins
Foaming Agent	Cyclopentane (38~40kg/m ³)
Controller	Elitech
Body Color (Outer/Inner)	B/B, B/W, W/W, W/B




CONFORMS TO UL
STD. 471
CERTIFIED TO CSA
STD. C22.2 No. 120



CONFORMS
TO NSF
STD. 7

DIMENSIONS

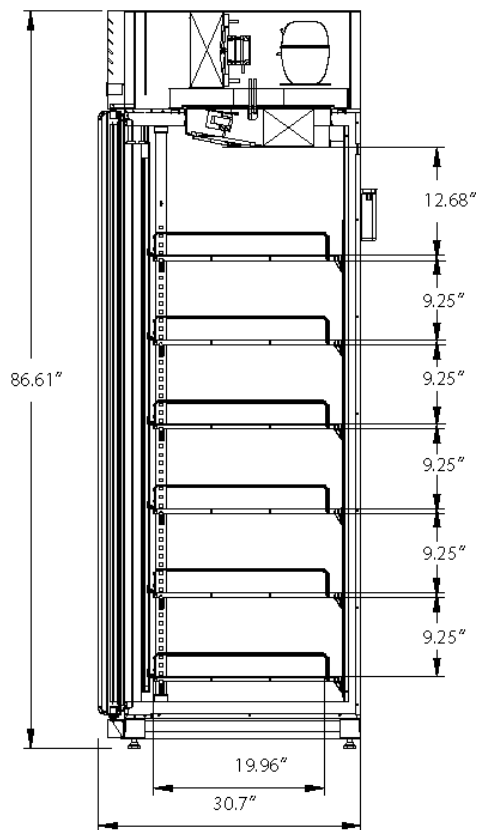


Model # PB-LB15E/KSX-L01

(Freezer)

Power Supply (Volt/Hertz)	110V/60Hz
Power (W)	1410W
Current Power (A)	15A
Receptacle	NEMA L5-30R
Body Size (L*D*H)	60"*30.7"*86.61"
Inner Dimension (excluding side panels) (L*D*H)	55.43*25.67*67.28
Shelves	10
Temperature	-0.4°F~7.6°F
Cooling System	Air Cooling
Compressor	Embraco / Secop
Fan Motor	EBM
Surrounding	III (77°F, 60%RH)
Refrigerant	R290
Evaporator	Copper Tubes with Aluminum Fins
Foaming Agent	Cyclopentane (38~40kg/m ³)
Controller	Elitech
Body Color (Outer/Inner)	B/B, B/W, W/W, W/B

PB-LB15E/KSX-M01:

Receptacle
NEMA 5-20R



PB-LB15E/KSX-L01:

Receptacle
NEMA L5-30R

